
Secur Double Wire





POWDER STEEL COATING

> ZINC COATING

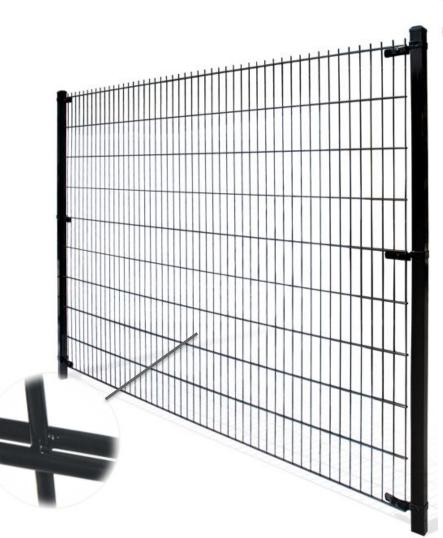

SECUR	
Panel	Double wire
Horizontal wire	2 x 0 GA
Vertical wire	1 x 4 GA
Mesh opening	2" x 8" - c/c nominal 1.74" x 7.60" – inside wires
Standard height	4', 6', 8'
Standard length	8' 3"
Square post	2"x2" or 3"x3" with Universal brackets (±1 ^{1/2} " slot allowance)
Caps	Two styles: square or square with ball
Special Panel Fitting	Versatile brackets adapt to many special applications
Opacity/Openness	16% / 84%
Finish	Pre-galvanized & powder coated, or hot- dipped galvanized unfinished



1735 St-Elzear Blvd. West, Laval (Quebec) Canada H7L 3N6 T 450 686-9600 | 1 800 836-6342 | F 450 681-7905 www.omegatwo.com | customerservice@omegatwo.com

